

Give and Take: An End-To-End Investigation of Giveaway Scam Conversion Rates

Enze Liu
UC San Diego
e7liu@ucsd.edu

George Kappos
Chainalysis
g.kappos@ucl.ac.uk

Eric Mugnier
UC San Diego
emugnier@ucsd.edu

Luca Invernizzi
Google
invernizzi@google.com

Stefan Savage
UC San Diego
ssavage@ucsd.edu

David Tao
Google
dtao@google.com

Kurt Thomas
Google
kurtthomas@google.com

Geoffrey M. Voelker
UC San Diego
voelker@ucsd.edu

Sarah Meiklejohn
Google
s.meiklejohn@ucl.ac.uk

ABSTRACT

Scams—fraudulent schemes designed to swindle money from victims—have existed for as long as recorded history. However, the Internet’s combination of low communication cost, global reach, and functional anonymity has allowed scam volumes to reach new heights. Designing effective interventions requires first understanding the context: how scammers reach potential victims, the earnings they make, and any potential bottlenecks for durable interventions. In this short paper, we focus on these questions in the context of cryptocurrency giveaway scams, where victims are tricked into irreversibly transferring funds to scammers under the pretense of even greater returns. Combining data from Twitter,¹ YouTube and Twitch livestreams, landing pages, and cryptocurrency blockchains, we measure how giveaway scams operate at scale. We find that 1 in 1000 scam tweets, and 4 in 100,000 livestream views, net a victim, and that scammers managed to extract nearly \$4.62 million from just hundreds of victims during our measurement window.

1 INTRODUCTION

Since the introduction of the Bitcoin whitepaper in 2008, cryptocurrencies and blockchain-based technologies have attracted attention from investors, technologists, researchers, governments, and the general public. Unsurprisingly, this rapid rise in popularity has also attracted scammers seeking to exploit the gap between people’s (high) interest in these technologies and their (low) technical understanding of their operation. Today, there are many types of scams run within the cryptocurrency ecosystem: Ponzi and pyramid schemes [10, 13, 29, 48, 54, 55]; NFT “rug pulls” [26, 45],

counterfeiting [16], airdrop scams [45]; pump-and-dump schemes [22, 57, 59]; and giveaway scams [33, 34, 53].

In a giveaway scam, users are enticed to visit a website that promises to give away a certain number of (cryptocurrency) coins. Often, the website leverages branding associated with a prominent public figure or company to increase its perceived legitimacy. To participate, users are instructed to send some coins to a cryptocurrency address specified on the website and are promised they will receive double the amount in return. These promised funds fail to materialize and, given the irreversible nature of cryptocurrency transactions, there is no way for the user to recover their money.

The existence of giveaway scam sites is well documented both in recent academic literature [33, 34, 53] and by online tech journalists [5, 51]. However, our understanding of how users are lured to these sites, the extent of victim participation, and the conversion rate that scammers can expect is largely anecdotal. Indeed, while there is received wisdom that scammers utilize mainstream “broadcast” style media such as Twitter, the extent to which such platforms represent the dominant source of such activity is unclear. Further complicating analysis is the fact that livestreaming platforms (e.g., YouTube and Twitch) often do not provide a retrospective record and thus must be analyzed contemporaneously with their use.

In this paper, we present an empirical analysis of cryptocurrency giveaway scams, conversion rates, and overall revenue. We focus on scams appearing on Twitter, YouTube, and Twitch, which Li et al. suggest are the most prevalent platforms for such activity [34]. From these platforms we collect posts (retrospectively) and streams (prospectively) and identify and crawl both existing and new promoted scam giveaway sites. From these, we extract the cryptocurrency addresses used to solicit victims for funds and quantify the revenue of these scams; we also explore different aspects of

¹The platform has been known as X since July 2023, but most of our analysis pertains to tweets posted before then so we continue to call it Twitter.

victim behavior (e.g., how victims pay in) and scammer behavior (e.g., how scammers promote on Twitter and YouTube as well as cash out). Together this data provides a broader vantage point for understanding the revenue model of giveaway scams and potential paths to interventions.

2 RELATED WORK

Our work builds on a number of prior efforts that have investigated cryptocurrency giveaway scams. Xia et al. [57] document dozens of giveaway scams while searching for Covid-themed cryptocurrency fraud reported by a variety of industry and government sources. Phillips and Wilder [43] analyzed hundreds of giveaways scams (which they refer to as advanced-fee scams) crowdsourced by victims and researchers on CryptoScamDB and URLScan. Li et al. [34] deployed the CryptoScamTracker tool, which found thousands of scam domains by examining Certificate Transparency (CT) log data for a six-month period between January and June 2022. The authors used a combination of scam-related keywords to identify potential scam domains, filtering down this list and then validating manually (i.e., that the site in fact hosts a scam) to obtain their scam domain corpus.

These efforts generally focus on scam sites themselves, however, and do not capture the modality by which victims are lured to visit. One recent such study is Vakiliinia’s qualitative analysis of giveaway scams livestreamed over two days on YouTube [53]. While small in scale, this work helps confirm our understanding of livestreamed scams and thus our methodology for finding them. Another example is Li et al.’s contemporaneous paper describing GiveawayScamHunter, which explores giveaway scams specifically promoted via Twitter Lists [33].

In addition to giveaway scams, the security community has explored a range of other cryptocurrency-related scams, including high-yield investment scams [9, 10, 12–14, 27, 29, 47, 48, 52, 54, 55]; fake or high-risk cryptocurrency-related services (e.g., arbitrage bots [32], exchanges [38, 54, 58], and new coins and tokens [18, 56]); initial coin offering scams [11, 35, 46, 50, 60]; sextortion scams [40, 42]; technical support scams [4]; scams and fraud in non-fungible token markets [16, 31]; and cryptocurrency-themed phishing websites [7, 23, 24, 43].

Finally, another relevant area of research focuses on understanding the risk models and security practices of cryptocurrency users [3, 6, 17, 21, 30, 41]. These studies help shed light on why or how users fall for scams in general, but do not specifically target giveaways or similar scams.

3 METHODOLOGY

Here, we describe our various sources of data and explain our methodology for identifying giveaway scams on social media (Twitter) and livestreams (Twitch and YouTube).

3.1 Data sources

We rely on three pre-existing datasets for our analysis: a snapshot of Twitter, a corpus of known giveaway scam domains and cryptocurrency addresses, and a snapshot of blockchain transactions. We add to this a new dataset derived from monitoring livestreams of giveaway scams and crawling the leads presented via the streams (discussed in Section 3.2).

Twitter dataset. Our Twitter dataset originates from a continuous Internet-wide crawl of public URLs, in a way that respects robots.txt and other rules for crawlers. For the purposes of this study, we restrict our analysis to publicly available tweets. Our dataset covers a period from April 1, 2020 until August 20, 2023. It does not contain every single tweet, and is biased towards tweets that are more discoverable (e.g., posted by accounts with a non-zero number of followers). Access to this data was granted to us only due to the nature of our research project and its potential to disrupt abusive behavior. In total, our snapshot contains tens of billions of tweets posted by hundreds of millions of accounts.

Giveaway scam dataset. We rely on a manually curated dataset made available by Li et al. [34] containing 3,863 domains previously identified as cryptocurrency giveaways over a period from January 1, 2022 to June 29, 2022. This dataset annotates each domain with the cryptocurrency addresses published at the time it was crawled. (Websites often use addresses for multiple different cryptocurrencies.) Starting from this dataset, we identified all tweets that contained at least one known scam domain, totaling 457,248 tweets from 33,841 distinct accounts (Table 1). Of the original 3,863 scam domains, only 361 (9%) appeared on Twitter—a sample of which we show in Figure 1—indicating that many scams are likely promoted through other means.

Blockchain data. We have access to a proprietary service [8] that aggregates raw blockchain data and annotates each address indicating (1) the *multi-input cluster* [37, 44] it belongs to and (2) the likely *category* of the real-world owner of that cluster.² These latter annotations are obtained via regular transactions that this company conducts with known cryptocurrency services, such as exchanges, and the former annotation avoids false positives (such as those induced by Coinjoin transactions) using proprietary heuristics.

²The service can be configured to provide the name of the cluster owner, but our agreement meant we had access only to the broader category.

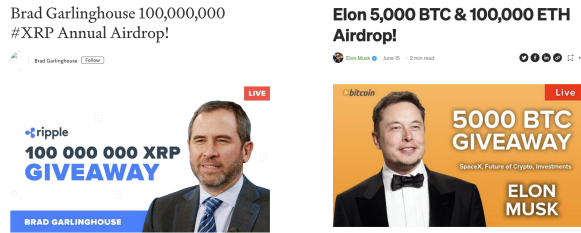


Figure 1: Example giveaway scam landing pages promoted via Twitter. Scammers impersonate popular personalities including Brad Garlinghouse (the Ripple CEO) and Elon Musk.

3.2 Identifying giveaway livestreams

We built a measurement pipeline for identifying and capturing giveaway scams on the YouTube and Twitch streaming services. These scam livestreams typically play a pre-recorded video that ultimately directs viewers to a scam page via a link or QR code. Figure 2 shows such an example, in which the scam page is promoted both as a QR code and as a link in the chat.

The measurement pipeline frequently polled available livestreams via platform APIs, recorded them, crawled the pages promoted by the QR codes and links, and annotated each scam page domain name with blockchain metadata. The design decisions behind this system are based on a 14-day pilot study conducted July 1–14, 2023. While we crawled both YouTube and Twitch, we did not detect any giveaway scams during our collection window for Twitch despite past reports of such scams [25]. As a result, we focus our subsequent discussion and analysis on YouTube, deferring Twitch-specific details to Appendix B.1.

Identifying potential giveaway streams. The measurement pipeline starts data collection by periodically querying the YouTube API for available streams and associated metadata. Given a set of keywords, the API returns livestreams that are associated with the keywords (in a manner similar to Google Search). Our system queried the API at the maximum rate allowed, which meant retrieving the list of livestreams and channel metadata (e.g., number of subscribers) every 30 minutes and retrieving livestream metadata (e.g., concurrent and total viewers) every 7.5 minutes. We derived our set of search keywords using a combination of popular cryptocurrency names and those used by Li et al. [34] (more details in Appendix B.2).

Stream and chat recording. The system recorded each livestream (using Streamlink [49]) and its associated chat (using the YouTube API) to identify linked URLs. In our pilot study, we observed that URLs either appeared in chat or were embedded in the video using a QR code. To capture embedded QR codes, the system recorded videos for two

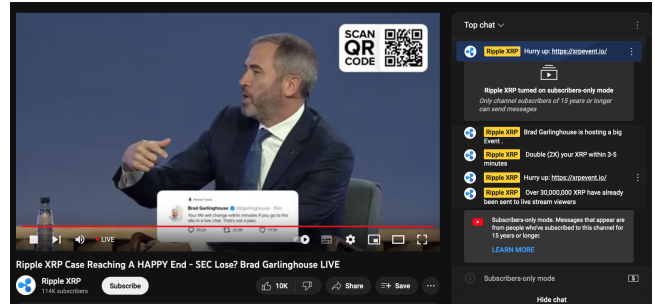


Figure 2: Example livestream containing a giveaway scam. The video playing is of Brad Garlinghouse and the scam website is linked to in both the chat and the embedded QR code.

seconds at a time, with snapshots taken every 7.5 minutes. For chats, the system polled the chat API every 7.5 minutes to obtain the last 70 historical messages (the maximum set by YouTube). Appendix B.3 provides more information on why two-second samples and 70 historical messages are sufficient.

Extracting URLs and QR code leads. From our livestream data, the system identified potential links to scams by (1) extracting URLs from chats via regular expressions; and (2) extracting and interpreting QR codes via visual analysis of the captured video frames using the opencv and pyzbar Python libraries. We use two libraries to increase the detection rate.

Crawling potential scam URLs. The system crawled each potential scam URL, revisiting both old and newly discovered websites daily until (1) we reached the end of our collection period, or (2) fetching the URL resulted in an error three days in a row. Prior work [34] suggested that some giveaway scam sites adopted anti-bot tactics. We identified four types of cloaking behavior in our pilot study (Appendix B.4) and counter these behaviors by: (1) using a VPN to mask the system IP address; (2) spoofing the User-Agent string to appear as a popular device and browser; (3) having a heuristic module to click through common front pages; and (4) verifying the crawler with Cloudflare to bypass anti-bot detection.

Validating scam URLs and identifying cryptocurrency addresses. We verified that every final clickthrough or landing page was related to a giveaway scam by (1) ensuring there was a valid cryptocurrency address published on the site. In addition, we require that either (2) the landing page included a set of heuristic keywords related to scams (e.g., “hurry” or “participate”) or (3) the domain contained a common set of scam keywords. For (1), we extracted addresses via a regular expression and then validated the address.³ For (2) and (3), we relied on the same keywords from the

³We used coinaddrvalidator [39] and multicoin-address-validator [15], and considered an address valid if either tool indicated that it was valid.

Source	Domains	Accounts	Artifacts
Twitter	361	33,841	457,248
YouTube	343	1632	2069

Table 1: The number of objects in our collected datasets. Accounts in the YouTube dataset correspond to channels, and artifacts are individual tweets or livestreams.

CryptoScamTracker tool. We then manually examined all sites (4,611) that met the requirements. To ensure that our heuristics do not miss a significant number of domains, we randomly sampled 389 sites that had only a valid cryptocurrency address and did not find any additional scam sites.

Final dataset. We ran our measurement pipeline from July 24, 2023 to January 21, 2024 (26 weeks), identifying a total of 2,069 livestreams from 1,632 different channels (Table 1). These streams linked to 343 distinct domains. Our data is continuous throughout this period apart from 11 days where we experienced infrastructure outages.⁴

3.3 Limitations

As with any measurement study, there are a number of limitations with our methodology. Our Twitter dataset may omit some tweets, resulting in us underestimating the volume of scam tweets or the revenue generated by scams; likewise, this may happen due to missing or inaccurate cryptocurrency addresses in the CryptoScamTracker dataset (as indeed we observed manually). Given that only 9% of the domains previously identified by CryptoScamTracker overlap with Twitter, it is also clear that many scams are promoted via other distribution channels—be it social media, email, or messaging. Finally, our keyword-based matching strategies for YouTube and Twitch likely resulted in omitting some scams. Despite these limitations, we are able to draw insights into the promotion of giveaway scams and provide the first estimates on the conversion rate and revenue of such campaigns.

4 GIVEAWAY SCAM LURES

We begin our analysis by examining the volume of tweets and livestreams (i.e., “lures”) that ultimately directed victims to scam landing pages; the tactics used by scammers to make their lures discoverable; and which cryptocurrencies were targeted by scammers.

4.1 Volume

In total, we observed 457,248 scam tweets and 2,069 scam livestreams. We present a weekly timeline of scam activity for Twitter in Figure 3 and YouTube in Figure 4. While scam lures appeared consistently throughout our measurement

⁴These dates are: 2023-08-15, 2023-08-16, 2023-09-01, 2023-09-28, 2023-10-06, 2023-11-18, 2023-11-19, 2023-12-26, 2023-12-12, 2024-01-06, and 2024-01-21.

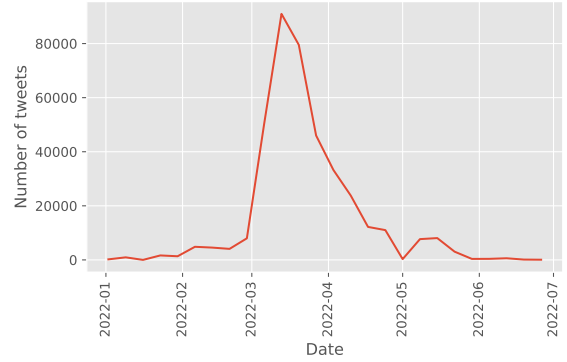


Figure 3: The volume of giveaway scam tweets on a given week, between January 1, 2022 and July 7, 2022.

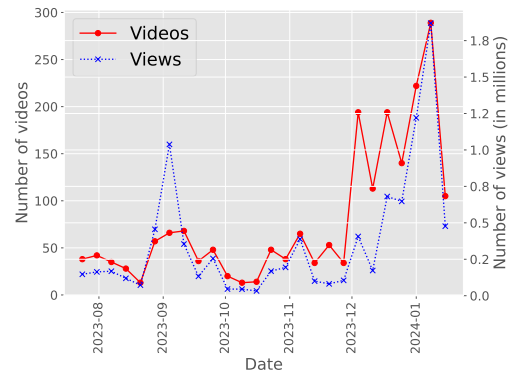


Figure 4: The volume of giveaway scam streams and views per week, between July 24, 2023 and January 21, 2024.

window, there are notable bursts of activity. For Twitter, we saw a single peak in activity in March 2022, with scammers posting a maximum of 90,984 tweets in a single week. On YouTube, we observed a burst in September 2023 and again over the holiday period of December–January 2024, peaking at 289 streams and 1,869,399 views in a single week. While these scams are smaller in scale compared to spam email campaigns involving tens of millions of messages [28], as we show shortly, they are nevertheless highly profitable.

4.2 Discoverability

To reach a broad audience on Twitter, scammers hashtagged their tweets 96% of the time (e.g., using a cryptocurrency’s name or ticker symbol). This meant that users searching for the latest news related to popular coins (e.g., #btc, #eth) might then interact with the scammer’s tweets. While scammers also pursued alternative audience-generating tactics on Twitter, such as mentioning users or replying to popular tweets, these strategies occurred in only 0.1% and 0.3% of tweets respectively.⁵ For YouTube, scammers reached victims

⁵For Twitter, our dataset lacks any information on the number of views per tweet, or the following or follower counts of accounts. As such, we focus on discoverability.

using a combination of organic viewership and search discoverability. Channels used by scammers to host livestreams had a median of 16.8K subscribers, with the single largest channel having 19 million subscribers—liked a compromised pre-existing channel. Beyond existing audiences, 93% of livestreams included a cryptocurrency keyword in their title, their description, or the name of the associated channel.

4.3 Currencies

To identify the cryptocurrencies most commonly targeted by scammers, we searched for relevant keywords in each tweet’s hashtags and each livestream’s title, channel name, and description, using the names and ticker symbols of the top 20 coins with the highest market capitalization (e.g., Bitcoin and btc).⁶ For Twitter, of these top 20 coins, Ripple was by far the most popular choice, matching 91% of the tweets in our dataset, followed by Ethereum (12%) and Bitcoin (7%). For YouTube, Bitcoin was the most popular coin (matching 65% of the livestreams), followed by Ethereum (49%) and Ripple (40%). Totals do not add to 100% as tweets and livestreams could reference multiple coins. The difference in currencies may be due to changes in tactics by scammers, with at least a year transpiring between our two datasets.

5 GIVEAWAY SCAM PAYMENTS

Using our raw blockchain data, we retrospectively analyzed payments to scammers to explore the revenue they reaped, the conversion rate per lure, the behavior of victims, and the payment infrastructure relied upon by scammers.

5.1 Isolating relevant payments

We focused on the three most popular coins targeted by scammers (per Section 4.3): Bitcoin (BTC), Ethereum (ETH), and Ripple (XRP). For each coin, we identified all incoming transactions to cryptocurrency addresses that appeared on a giveaway scam landing page posted to Twitter or YouTube. We filtered the set of incoming transactions to an identified scam address in two key ways. First, following Gomez et al. [19], we ignored transactions where the sender is a known scam address, as this clearly represents the consolidation of funds rather than a payment from an actual victim. Second, we focused on payments that co-occurred with a lure in order to capture the lure’s effectiveness in driving victims to the scam. We acknowledge that the resulting set of payments might both include non-victim transactions (from unknown scammer addresses) and exclude victim transactions (due to lures that we were not aware of); nevertheless, we use it as an approximation of victim payments to the scam. We believe this is a more accurate estimate than previous studies,

⁶We fetched the coins and their ranking from coinmarketcap.com on August 7, 2023.

Metric	Twitter	YouTube
Payments (co-occurring)	671	638
Payments (any)	1633	2074
USD revenue (co-occurring)	2,693,009	1,932,654
<i>from BTC</i>	1,269,579	1,422,065
<i>from ETH</i>	442,583	266,693
<i>from XRP</i>	980,847	243,896
USD revenue (any)	6,598,691	4,705,978

Table 2: Revenue of giveaway scams on Twitter and YouTube livestreams, considering only co-occurring payments made in BTC, ETH, or XRP. For completeness, we also include all payments to the addresses, irrespective of what might explain the origin of the payment.

which considered all incoming transactions [34], but also compare with the total revenue (across all transactions) and leave as future work a further refinement of our analysis that takes other behaviors into account.

5.2 Twitter scam revenue

The 361 domains promoted by scammers on Twitter used 186 distinct addresses (with some domains having multiple addresses due to accepting different cryptocurrencies). After filtering out domains that did not use any BTC, ETH, or XRP addresses, we were left with 258 domains. Of these, only 121 (47%) received any incoming transaction; i.e., fewer than half of the domains received any transaction at all. For the 121 domains that received a transaction, we compared the transaction times to the times of the tweets promoting the scam domain. We considered a payment as co-occurring if it happened within one week of a tweet’s appearance. Despite this generous window, only 43% of payments (695 of 1,633) fell within it. Of these, we removed a further 24 payments that came from known scam addresses, resulting in a final dataset of 671 payments.

Table 2 summarizes the overall co-occurring revenue made across Twitter and YouTube, normalizing payment values across cryptocurrencies using the average USD price of each coin on the day in which the payment took place.⁷ In total, we estimate that Twitter-based giveaway scams yielded \$2.7M in revenue. If we include all incoming transactions to these addresses then the total jumps to \$6.6M; as suggested above, the real revenue likely lies between the two numbers.

5.3 YouTube livestream scam revenue

Across the 343 domains promoted via YouTube, 342 domains had a BTC, ETH, or XRP address. Of these domains, 231 (67%) had addresses that received at least one transaction. As with Twitter, we looked at the timing of each incoming

⁷We used historical data from <https://finance.yahoo.com/crypto/>.

transaction for livestream addresses. We considered it as co-occurring with a livestream if the transaction occurred during the stream or up to eight hours after it ended. Our goal was again to provide a generous window, but the result was similar: only 34% of payments to the addresses (695 of 2074) fell within this time interval. We removed another 57 payments from known scam addresses, resulting in our final dataset of 638 payments.

Table 2 summarizes the overall revenue made by livestream scams. In total, we estimate that livestream-based giveaway scams yielded \$1.9M. If we include all incoming transactions to these addresses, the total increases to \$4.7M.

5.4 Victim behavior

Conversions. The 671 Twitter-related payments had 528 unique senders, and the 638 livestream-related payments had 399 unique senders. These metrics put into context the huge volume of lures necessary to attract a victim that ultimately pays out. For Twitter, the conversion rate of tweets (with associated cryptocurrency addresses) to victims was 0.12%—or roughly 1 in 1000 tweets netting a victim. For YouTube, the conversion rate of viewers to victims was 0.0039%—or roughly 4 in 100,000 views netting a victim. We caution comparing these figures directly as there is an unknown number of viewers per tweet.

Payment origins. For the 1,309 payments across Twitter and YouTube, 755 (58%) came from centralized exchanges;⁸ the results of Phillips and Wilder suggest that this number would increase if we used more advanced blockchain analysis to track the source of funds [43]. The prevalence of exchanges is not surprising, as we would expect many victims of this type of scam to have a low level of comfort making cryptocurrency transactions directly.

Payment distribution. The total revenue was dominated by a small number of transactions: the top 24 Twitter-related payments captured 50% of the value, while the top 164 payments captured 90% of the value. YouTube scams exhibited a similar phenomenon: 20 payments captured 50% of the value and 147 payments 90% of the value. These results suggest that the giveaway scam revenue model is significantly influenced by large transactions, where the goal for promoting the scam is to cast a wide net and, in doing so, capture a small fraction of victims who will give large amounts (analogous to the whale profit model for free-to-play mobile games [20]). Such a model notably differs from the email spam ecosystem, for instance, in which the variance in individual customer payments is moderate and leads to a business model driven by order volume from new and repeat customers [36].

⁸As we saw only the category of each sender, rather than the name, we cannot break down such senders into individual exchanges.

5.5 Scammer behavior

Across the 1,309 payments, there were only 339 distinct recipients: 68 for Twitter-related payments and 271 for YouTube-related ones; given the similar number of payments, this suggests scammers running YouTube campaigns made more of an effort to cycle between different addresses. Of these, 145 of 166 (87%) of the BTC addresses were in a multi-input cluster of size one, which suggests that scammers made an explicit effort to prevent address clustering.

Similarly, when looking at outgoing transactions from these addresses, only 4% of the recipients (57 of 1,363) were labeled as belonging to a centralized exchange. Another 87% of recipients were unlabeled, which again suggests the need for more advanced blockchain analysis [43] to identify additional exchange interactions. Of the remaining categories associated with recipients, some suggested meaningful knowledge of how to use cryptocurrency (e.g., 13 recipients were tagged as ‘token smart contract’ and four as ‘mixing’) and others suggested that the scammers operated within a larger illicit ecosystem (22 recipients were tagged as ‘scam’ and 13 as ‘sanctioned entity’).

Altogether, these results suggest a profitable business for a set of knowledgeable and technically sophisticated scammers who take advantage of a set of victims with low technical sophistication and knowledge about cryptocurrencies.

6 DISCUSSION

Based on our findings, we compare the revenue of giveaway scams relative to past scams and discuss the prospects of interventions to undermine giveaway scams.

6.1 Comparing scam revenue

Previous studies of pharmaceutical spam estimated a conversion rate of 0.00001%, with spam generating \$100 per interaction [28]. While our conversion rates are not directly comparable (e.g., tweets or livestreams vs. emails), they are markedly higher than email-based spam: 0.12% of tweets and 0.0039% of livestream views yielded a victim.

Multiple factors may explain the higher returns for cryptocurrency giveaway scams. First, the relatively nascent abuse landscape of cryptocurrency may mean users are less familiar with fraud and its risks as compared to email spam. Second, the rags to riches narratives surrounding cryptocurrency may make a headline of “5000 BTC giveaway” more believable, particularly when there are real headlines such as “Elon Musk will give away 1 million Dogecoin if you can prove his family own emerald mine” [2].

6.2 Interventions

A natural question for any scam is where bottlenecks exist that might be ripe for disruption. Here, one choice appears to

be the payment origins of victims, as at least 58% of victims relied on centralized exchanges. Early detection of payments to scammers via these exchanges represents a sizable and durable protection [1]: scammers likely cannot influence the exchange that victims use, as we suspect most victims have low comfort with using cryptocurrency directly. In addition, similar to what banks already implement, exchanges can consider implementing additional warnings when users attempt to make large transactions, which constitute a large portion of the revenue in our study. That said, detecting the cryptocurrency addresses engaging in fraud and informing these exchanges promptly remain challenging and require collaboration across multiple sectors.

7 CONCLUSIONS

In this paper, we provided a first look at cryptocurrency giveaway scams conducted via social media and livestreams. Scammers collectively earned \$2.7M via Twitter scams and \$1.9M via livestreams. These earnings reflect a conversion rate of 0.12% per tweet and 0.0039% per livestream viewer. We believe that interventions require a defense-in-depth approach. Apart from traditional account-based and blacklist-based security measures, cryptocurrency exchanges appear to be a promising bottleneck for depriving scammers of the means to transact with victims.

REFERENCES

- [1] How to turn on security alerts. <https://support.metamask.io/privacy-and-security/how-to-turn-on-security-alerts/>.
- [2] E. Abraham. Elon Musk will give away 1 million Dogecoin if you can prove his family own emerald mine. <https://www.indy100.com/science-tech/elon-musk-emerald-mine-dogecoin-2659890703>, Apr. 2023.
- [3] S. Abramova, A. Voskoboynikov, K. Beznosov, and R. Böhme. Bits under the mattress: Understanding different risk perceptions and security behaviors of crypto-asset users. In *Proceedings of the 2021 CHI Conference on Human Factors in Computing Systems*, pages 1–19, 2021.
- [4] B. Acharya, M. Saad, A. E. Cinà, L. Schönherr, H. D. Nguyen, A. Oest, P. Vadvre, and T. Holz. Conning the crypto conman: End-to-end analysis of cryptocurrency-based technical support scams. In *Proceedings of the 2024 IEEE Symposium on Security & Privacy (S&P)*, 2024.
- [5] S. Ahmed. Linus Tech Tips YouTube channel hacked to promote Elon Musk crypto scam videos, Mar. 2023. <https://www.dexerto.com/entertainment/linus-tech-tips-youtube-channel-hacked-crypto-elon-musk-scam-2094461/>.
- [6] A. Alshamsi and P. Andras. User perception of Bitcoin usability and security across novice users. *International Journal of Human-Computer Studies*, 126:94–110, 2019.
- [7] A. Andryukhin. Phishing attacks and preventions in blockchain based projects. In *2019 international conference on engineering technologies and computer science (EnT)*, pages 15–19. IEEE, 2019.
- [8] Anonymized for submission, 2023.
- [9] M. Bartoletti, S. Carta, T. Cimoli, and R. Saia. Dissecting Ponzi schemes on Ethereum: identification, analysis, and impact. *Future Generation Computer Systems*, 102:259–277, 2020.
- [10] M. Bartoletti, B. Pes, and S. Serusi. Data mining for detecting Bitcoin Ponzi schemes. In *Proceedings of the Crypto Valley Conference on Blockchain Technology (CVCBT)*, 2018.
- [11] S. Bian, Z. Deng, F. Li, W. Monroe, P. Shi, Z. Sun, W. Wu, S. Wang, W. Y. Wang, A. Yuan, et al. Icorating: A deep-learning system for scam ICO identification. *arXiv preprint arXiv:1803.03670*, 2018.
- [12] Y. Boshmaf, C. Elvitigala, H. Al Jawaheri, P. Wijesekera, and M. Al Sabah. Investigating MMM Ponzi scheme on Bitcoin. In *Proceedings of the 15th ACM Asia Conference on Computer and Communications Security*, pages 519–530, 2020.
- [13] W. Chen, Z. Zheng, J. Cui, E. Ngai, P. Zheng, and Y. Zhou. Detecting Ponzi schemes on Ethereum: Towards healthier blockchain technology. In *Proceedings of the 2018 World Wide Web Conference*, 2018.
- [14] W. Chen, Z. Zheng, E. C.-H. Ngai, P. Zheng, and Y. Zhou. Exploiting blockchain data to detect smart Ponzi schemes on Ethereum. *IEEE Access*, 7:37575–37586, 2019.
- [15] Christsim. multicoin-address-validator - npm, 05 2024.
- [16] D. Das, P. Bose, N. Ruaro, C. Kruegel, and G. Vigna. Understanding security issues in the NFT ecosystem. In *Proceedings of the ACM Conference on Computer and Communications Security (CCS)*, 2022.
- [17] M. Fröhlich, M. R. Wagenhaus, A. Schmidt, and F. Alt. Don’t stop me now! exploring challenges of first-time cryptocurrency users. In *Designing Interactive Systems Conference 2021*, pages 138–148, 2021.
- [18] B. Gao, H. Wang, P. Xia, S. Wu, Y. Zhou, X. Luo, and G. Tyson. Tracking counterfeit cryptocurrency end-to-end. *Proceedings of the ACM on Measurement and Analysis of Computing Systems*, 4(3):1–28, 2020.
- [19] G. Gomez, K. van Liebergen, and J. Caballero. Cybercrime Bitcoin revenue estimations: Quantifying the impact of methodology and coverage. In *Proceedings of ACM CCS*, pages 3183–3197, 2023.
- [20] M. Grguric. What Are Mobile Game Whales and How to Catch Them? <https://www.blog.udonis.co/mobile-marketing/mobile-games/mobile-games-whales>, Mar. 2024.
- [21] Y. Guan, Y. Yu, T. Sharma, K. Qin, Y. Wang, and Y. Wang. Examining user perceptions of stablecoins: Understandings and risks. In *Posters at the Symposium on Usable Privacy and Security (SOUPS)*, 2023.
- [22] J. Hamrick, F. Rouhi, A. Mukherjee, A. Feder, N. Gandal, T. Moore, and M. Vasek. The economics of cryptocurrency pump and dump schemes. *SSRN Electronic Journal*, 01 2018.
- [23] B. He, Y. Chen, Z. Chen, X. Hu, Y. Hu, L. Wu, R. Chang, H. Wang, and Y. Zhou. Txphishscope: Towards detecting and understanding transaction-based phishing on Ethereum. In *Proceedings of the 2023 ACM SIGSAC Conference on Computer and Communications Security*, pages 120–134, 2023.
- [24] A. Holub and J. O’Connor. Coinhoarder: Tracking a Ukrainian Bitcoin phishing ring DNS style. In *2018 APWG Symposium on Electronic Crime Research (eCrime)*, pages 1–5. IEEE, 2018.
- [25] D. Horetski. Twitch battles fake Elon Musk streams again with scam Bitcoin giveaways. <https://www.dexerto.com/entertainment/twitch-battles-fake-elon-musk-streams-again-with-scam-bitcoin-giveaways-1803537/>, Apr. 2022.
- [26] J. Huang, N. He, K. Ma, J. Xiao, and H. Wang. A deep dive into NFT rug pulls, 2023. <https://arxiv.org/pdf/2305.06108.pdf>.
- [27] E. Jung, M. Le Tilly, A. Gehani, and Y. Ge. Data mining-based Ethereum fraud detection. In *2019 IEEE international conference on blockchain (Blockchain)*, pages 266–273. IEEE, 2019.
- [28] C. Kanich, C. Kreibich, K. Levchenko, B. Enright, G. M. Voelker, V. Paxson, and S. Savage. Spamalytics: An empirical analysis of spam marketing conversion. In *Proceedings of the Conference on Computer and Communications Security*, 2008.
- [29] T. Kell, H. Yousaf, S. Allen, S. Meiklejohn, and A. Juels. Forsage: Anatomy of a smart-contract pyramid scheme. In *Proceedings of the 27th Conference on Financial Cryptography and Data Security*, 2023.

- [30] K. Krombholz, A. Judmayer, M. Gusenbauer, and E. Weippl. The other side of the coin: User experiences with Bitcoin security and privacy. In *Financial Cryptography and Data Security: 20th International Conference, FC 2016, Christ Church, Barbados, February 22–26, 2016, Revised Selected Papers 20*, pages 555–580. Springer, 2017.
- [31] N. Kshetri. Scams, frauds, and crimes in the nonfungible token market. *Computer*, 55(4):60–64, 2022.
- [32] K. Li, S. Guan, and D. Lee. Towards understanding and characterizing the arbitrage bot scam in the wild. *Proceedings of the ACM on Measurement and Analysis of Computing Systems*, 7(3):1–29, 2023.
- [33] K. Li, D. Lee, and S. Guan. Understanding the cryptocurrency free giveaway scam disseminated on Twitter lists. In *2023 IEEE International Conference on Blockchain (Blockchain)*, pages 9–16. IEEE, 2023.
- [34] X. Li, A. Yepuri, and N. Nikiforakis. Double and nothing: Understanding and detecting cryptocurrency giveaway scams. In *Proceedings of the Network and Distributed Systems Security (NDSS) Symposium*, 2023.
- [35] D. Liebau and P. Schueffel. Crypto-currencies and ICOs: Are they scams? an empirical study, 2019. https://papers.ssrn.com/sol3/papers.cfm?abstract_id=3320884.
- [36] D. McCoy, A. Pitsillidis, G. Jordan, N. Weaver, C. Kreibich, B. Krebs, G. M. Voelker, S. Savage, and K. Levchenko. PharmaLeaks: Understanding the Business of Online Pharmaceutical Affiliate Programs. In *Proceedings of the 21st USENIX Security Symposium*, Bellevue, WA, Aug. 2012.
- [37] S. Meiklejohn, M. Pomarole, G. Jordan, K. Levchenko, D. McCoy, G. M. Voelker, and S. Savage. A fistful of bitcoins: Characterizing payments among men with no names. In *Proceedings of the Internet Measurement Conference - IMC '13*, pages 127–140, 2013.
- [38] T. Moore and N. Christin. Beware the middleman: Empirical analysis of Bitcoin-exchange risk. In *Financial Cryptography and Data Security: 17th International Conference, FC 2013, Okinawa, Japan, April 1-5, 2013, Revised Selected Papers 17*, pages 25–33. Springer, 2013.
- [39] Nobitex. Github - nobitex/coinaddrvalidator, 05 2024.
- [40] F. Oggier, A. Datta, and S. Phetsouvanh. An ego network analysis of sextortionists. *Social Network Analysis and Mining*, 10:1–14, 2020.
- [41] S. K. Ooi, C. A. Ooi, J. A. Yeap, and T. H. Goh. Embracing Bitcoin: users’ perceived security and trust. *Quality & Quantity*, 55:1219–1237, 2021.
- [42] M. Paquet-Clouston, M. Romiti, B. Haslhofer, and T. Charvat. Spams meet cryptocurrencies: Sextortion in the bitcoin ecosystem. In *Proceedings of the 1st ACM conference on advances in financial technologies*, pages 76–88, 2019.
- [43] R. Phillips and H. Wilder. Tracing cryptocurrency scams: Clustering replicated advance-fee and phishing websites. In *2020 IEEE international conference on blockchain and cryptocurrency (ICBC)*, pages 1–8. IEEE, 2020.
- [44] F. Reid and M. Harrigan. An analysis of anonymity in the Bitcoin system. In *Security and Privacy in Social Networks*, page 197–223, 2013.
- [45] S. S. Roy, D. Das, P. Bose, C. Kruegel, G. Vigna, and S. Nilizadeh. Unveiling the risks of NFT promotion scams, 2023. <https://arxiv.org/pdf/2301.09806.pdf>.
- [46] N. Sapkota, K. Grobys, and J. Dufitinema. How much are we willing to lose in cyberspace? On the tail risk of scam in the market for initial coin offerings. *On the Tail Risk of Scam in the Market for Initial Coin Offerings (November 18, 2020)*, 2020.
- [47] G. A. Siu and A. Hutchings. “Get a higher return on your savings!”: Comparing adverts for cryptocurrency investment scams across platforms. In *2023 IEEE European Symposium on Security and Privacy Workshops (EuroS&PW)*, pages 158–169. IEEE, 2023.
- [48] G. A. Siu, A. Hutchings, M. Vasek, and T. Moore. “Invest in crypto!”: An analysis of investment scam advertisements found in Bitcointalk. In *Proceedings of the Symposium on Electronic Crime Research (eCrime 2022)*, 2022.
- [49] Streamlink. Streamlink 6.7.4 documentation, 05 2024.
- [50] M. Tiwari, A. Gepp, and K. Kumar. The future of raising finance-a new opportunity to commit fraud: a review of initial coin offering (icos) scams. *Crime, Law and Social Change*, 73:417–441, 2020.
- [51] B. Toulas. Fake cryptocurrency giveaway sites have tripled this year, Sept. 2022. <https://www.bleepingcomputer.com/news/security/fake-cryptocurrency-giveaway-sites-have-tripled-this-year/>.
- [52] K. Toyoda, P. T. Mathiopoulos, and T. Ohtsuki. A novel methodology for HYIP operators’ Bitcoin addresses identification. *IEEE Access*, 7:74835–74848, 2019.
- [53] I. Vakilinia. Cryptocurrency giveaway scam with YouTube live stream. In *Proceedings of the IEEE 13th Annual Ubiquitous Computing, Electronics & Mobile Communication Conference (UEMCON)*, 2022.
- [54] M. Vasek and T. Moore. There’s no free lunch, even using Bitcoin: Tracking the popularity and profits of virtual currency scams. In *Proceedings of the 19th Conference on Financial Cryptography and Data Security*, 2015.
- [55] M. Vasek and T. Moore. Analyzing the Bitcoin Ponzi scheme ecosystem. In *Proceedings of the 5th Workshop on Bitcoin and Blockchain Research*, 2018.
- [56] P. Xia, H. Wang, B. Gao, W. Su, Z. Yu, X. Luo, C. Zhang, X. Xiao, and G. Xu. Trade or trick? detecting and characterizing scam tokens on Uniswap decentralized exchange. *Proceedings of the ACM on Measurement and Analysis of Computing Systems*, 5(3):1–26, 2021.
- [57] P. Xia, H. Wang, X. Luo, L. Wu, Y. Zhou, G. Bai, G. Xu, G. Huang, and X. Liu. Don’t fish in troubled waters! characterizing coronavirus-themed cryptocurrency scams. In *Proceedings of the Symposium on Electronic Crime Research (eCrime 2020)*, 2020.
- [58] P. Xia, H. Wang, B. Zhang, R. Ji, B. Gao, L. Wu, X. Luo, and G. Xu. Characterizing cryptocurrency exchange scams. *Computers & Security*, 98:101993, 2020.
- [59] J. Xu and B. Livshits. The anatomy of a cryptocurrency pump-and-dump scheme. In *Proceedings of the 28th USENIX Security Symposium*, pages 1609–1625, 2019.
- [60] D. A. Zetsche, R. P. Buckley, D. W. Arner, and L. Föhr. The ICO gold rush: It’s a scam, it’s a bubble, it’s a super challenge for regulators. *University of Luxembourg Law Working Paper*, pages 17–83, 2017.

A ETHICS

Our work relies largely on public APIs (e.g., those provided by YouTube and Twitch) and public data (e.g., blockchain data and public tweets). We do not seek to deanonymize individuals involved in the transactions we explore, and aim to reduce this risk by obtaining only the category of cryptocurrency services as attribution tags, rather than the name of individual services. Finally, we conducted all of our analysis retrospectively, which means we did not have the opportunity to report the identified scams as they were being promoted and thus potentially help their victims.

B STREAM RETRIEVAL PILOT STUDY

In this section, we provide more details on our pilot study conducted July 1-14, 2023. We start by discussing our attempt to identify scam livestreams on Twitch (Section B.1). Our

search yielded no results, and thus we excluded Twitch from future experiments. Next, we detail how we chose the set keywords for searching on YouTube. Then, we go over the characteristics of a subset of the scam livestreams identified during the pilot study. We conclude with a short description of four anti-bot mechanisms employed by scam sites and the strategies we employed to counter them.

B.1 Twitch details

In this section, we discuss our methodology for identifying potential scam livestreams on Twitch.

Identifying relevant streams. The Twitch API allows callers to retrieve all livestreams at a given point in time. We retrieve the list of all livestreams every 30 minutes, which is roughly the amount of time we need to record and process the streams in that batch.

After retrieving all streams we identify the ones that are the most worth recording; i.e., that seem most likely to be promoting giveaway scams. The YouTube API already performs filtering, as it returns only streams related to the provided keywords. To filter out irrelevant streams on Twitch, we use their title, tags, and category. We start by marking a stream as relevant if its tags or title contain any relevant keywords. We derived our set of relevant keywords from the keywords used by CryptoScamTracker, but removed 16 non-crypto keywords (e.g., “event” and “give”) as they introduced too many irrelevant results. After filtering out streams that are not relevant, we then further remove any streams that are games using the category of the stream. This step effectively limits the number of streams to around 250.

Recording duration in pilot study. Twitch randomly inserts a 15-second advertisement clip before the actual stream content. To account for this issue, we record every Twitch stream for 20 seconds. For chat messages, Twitch’s API does not provide history for chat messages. As a result, we record the Twitch chat for the entire duration of the stream.

Stream and chat recording. We recorded streams and chats at our maximum capacity: sampling a stream for 20 seconds every 30 minutes (the minimum time needed to record and process a batch of streams) and recording the chat messages of a stream while it is live. We extracted any URL embedded in the stream as a QR code or in the chat messages.

We ran this experiment for non-gaming streams that we identified in the filtering module as well as for 250 gaming streams that contained the most keywords. We did not find any scam livestreams during our 14-day pilot study, and thus excluded Twitch from further analysis.

B.2 Effectiveness of YouTube Search Keywords

Based on our pilot analysis, we opted for a set of keywords consisting of the names and ticker symbols of the top 20 cryptocurrencies (as listed on coinmarketcap.com on July 1, 2023),⁹ along with two catch-all terms: “cryptocurrency” and “crypto.” We added other keywords used by the CryptoScamTracker tool [34, Table XI] to increase coverage. We found that many of the additional keywords were not useful in expanding our list of relevant streams, and thus stopped expanding our keyword set.

In more detail, we examine the incremental contribution of each search keyword (Table 3) to the set of livestreams returned from the YouTube API. Specifically, we compute the number of YouTube streams (over the 14-day pilot study) that contain search keywords in their metadata (title and description). If one stream contains multiple keywords, we give credit evenly among all keywords.

Figure 5 shows the result. Overall, around 55% of the streams contained at least one of the search keywords, and the top 20 keywords account for 90% of those streams. Among the streams that do not contain any search keyword, roughly 50% are not in English. Sampling English streams that do not contain any keyword, we find that they are either on crypto-adjacent topics (e.g., trading) or completely irrelevant topics (e.g., live street camera).

B.3 Characteristics of scam livestreams

In our 14-day pilot study, we sought to understand the basic characteristics of scam livestreams and websites, which in turn informed the configuration of the parameters in our pipeline (e.g., for how long we record a scam livestream). Specifically, we are interested in two questions: (1) how long a QR code lasts once it appears and (2) how many chat messages are posted during the lifespan of a scam livestream. We started by running our pipeline at maximum capacity on YouTube, with the default setup of recording a stream for two seconds as well as retrieving up to 70 historical chat messages every 7.5 minutes. In addition, for a subset of the livestreams, we kept recording the stream upon detecting a QR code.

With this setup, we manually identified 276 streams that promoted 59 unique giveaway websites. To answer the first question, we examined how long a QR code lasted after we first detected it. For 41 scam livestreams, we continued to record them upon detecting a QR code. We found that for the majority of the livestreams, a QR code remained displayed continuously for a reasonable amount of time (mean 7,200 seconds and median 3,140 seconds), except for one case

⁹In three cases (for ADA, SOL, and DOT), we appended the word “coin” to the ticker symbol to avoid introducing irrelevant streams.

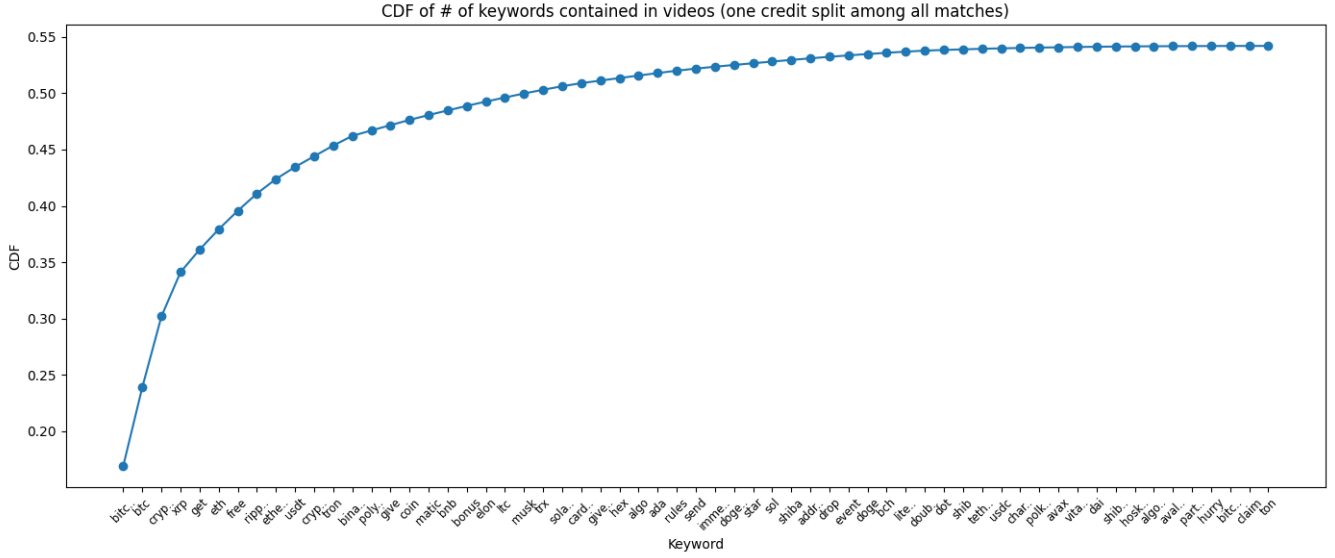


Figure 5: Effectiveness of keywords

Category	Keywords used
Coin names	bitcoin btc ethereum eth tether usdt ripple xrp bnb “usd coin” usdc cardano ada coin ada dogecoin doge solana sol tron trx litecoin ltc polkadot dot polygon matic wrapped bitcoin wbtc bitcoin cash bch toncoin ton dai avalanche avax shiba inu shib binance usd busd algorand algo hex cryptocurrency crypto
Domain keywords	kf event musk elon give coin shiba drop double get doge kefu vitalik claim binance hoskinson free charles star garling
HTML keywords	giveaway participate send address rules crypto bonus immediately hurry

Table 3: Keywords used to find relevant streams.

where the QR code was displayed periodically for around 15 seconds. This finding suggests that two-second samples are enough to capture a QR code in the livestream, if present. For the latter question, we examined scam streams that had chat messages. We found that all scam streams had few chat messages (less than 10) and no user interactions, and thus decided that 70 historical chat messages every 7.5 minutes is sufficient.

B.4 Cloaking Behaviors of Scam Websites

As part of our pilot, we identified four types of cloaking behavior: (1) IP-based cloaking, in which requests from an institutional network resulted in 403 responses but ones from a residential network did not; (2) user agent-based cloaking, in which requests from browsers that were not running on Windows or Mac resulted in 403 responses; (3) customized front pages, in which human interaction was required to click on a button or select a desired cryptocurrency; and (4) anti-bot detection through Cloudflare. As previously mentioned,

to counter these behaviors, we (1) used a commercial VPN to mask our IP address; (2) spoofed our User-Agent string to appear as a popular device and browser; (3) added a heuristic module to click through common front pages; and (4) verified our crawler with Cloudflare to avoid triggering their anti-bot detection.